


arches

VARIATIONS COLLECTION FOR WALLS & CEILINGS



JAMIE BECKWITH®
COLLECTION

1. PATTERN & REPEAT

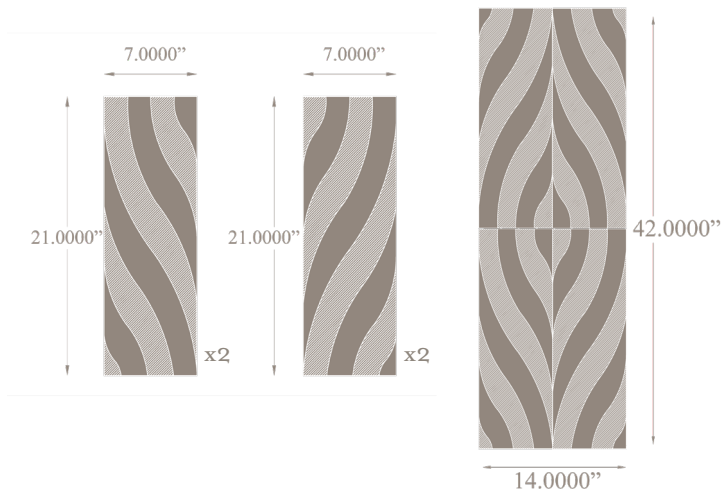

2. LAYOUT SUGGESTIONS



SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.
4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

4 Tiles: 4.08 SF
2 Right & 2 Left.

BOX QUANTITY:

16.32 SF per box.
16 Tiles total per box/ 4 repeats.

COVERAGE PER TILE:

1.02 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)
Wood tiles are NOT provided on a mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings.
Not suitable for areas exposed to running water: inside showers, etc.
Not suitable for outdoor applications.
Not suitable for flooring.

LEADTIME:

6-8 weeks for production.
Expedited options available upon request for an upcharge.

PRICING:

Varies by pattern & wood species.
Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC.
Available unfinished.

LEED CREDITS:


2009 NC/CI MR Credit 5 - Regional Materials
2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.


CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.


3. SPECIES



Plain White Oak




Bark



Natural



Driftwood



Slate

4. STAINS