

40' HALF HEIGHT OFFSHORE BASKET

40' x 8'6" x 4'2"

Removable End Doors

Hot Dip Galvanized or Painted Finish



CERTIFICATIONS

DNV 2.7-1 (DNVGL-ST-E271) Standard for Offshore Containers

ISO 10855 International Standard for Offshore Containers and associated lifting sets


In support of IMO MSC Circ 860

API / Shell OPS0055 by request

Classification Society : Lloyd's Register or Det Norske Veritas (DNV)

DIMENSIONS (+/- 1/4")

	EXTERNAL	INTERNAL
Length	12192 mm 40'	11892 mm 39'-3/16"
Width	2591 mm 8'-6"	2291 mm 7'-6 3/16"
Height	1275 mm 4'-2 3/16"	915 mm 3'
Door Opening Width		2110 mm 6' - 11 1/16"
Internal Cubic Capacity		24.9 M ³ 879 FT ³

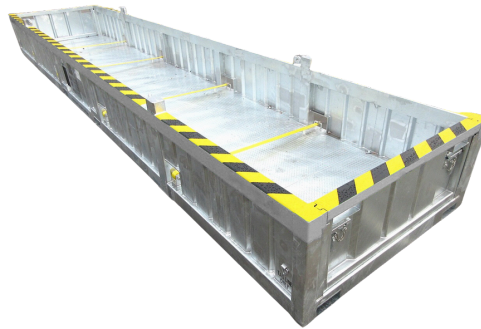

RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	22,000 kg	48,500 lbs
Max Payload	16,200 kg	35,710 lbs
Tare Weight	5,800 kg	12,790 lbs

For Standard Cargo / Forklift Lift Movement

Max Gross Weight	22,000 kg	48,500 lbs
Max Payload	16,200 kg	35,710 lbs
Tare Weight	5,800 kg	12,790 lbs



INCLUDES

- DNV Certified Wire Rope Lifting Sling
- Full Data Book
- Original Certificates
- Electronic Mobilization Packet
- Delivery to your yard

