




7.0000" 7.0000" 7.0000 7.0000 7.0000

2. LAYOUT SUGGESTIONS

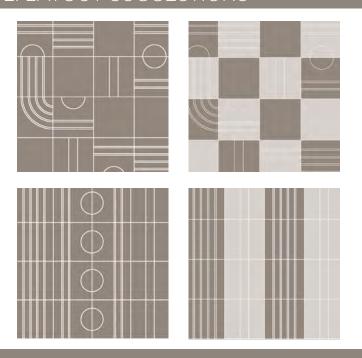

SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

6 Tiles: 2.04 SF

2 Blank tiles & I of each etched tile.

BOX QUANTITY:

20.4 SF per box.

60 tiles total per box/ 10 repeats.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

****This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

. SPECIE



Plain White Oak



Quarter White

4. STAINS



Dolphin





Black Onyx



Grey Moonstone















Sapphire



Polished Amber





Smokey Quartz

Smokey Quartz







Grey Moonstone Pickled Pearl



Pickled Pearl








Sapphire





2. LAYOUT SUGGESTIONS









SPECIFICATIONS

WOOD TILE CONSTRUCTION:

7.0000"

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Tiles: .68 SF

I Right & I Left.

BOX QUANTITY:

20.4 SF per box.

60 tiles total per box/ 30 repeats.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

7.0000"

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.



Plain White Oak



Quarter White

4. STAINS











Pickled Pearl













Sapphire
















Sapphire






1. PATTERN AND REPEAT

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

****This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES



Plain White Oak



Quarter White

4. STAINS









Grey Moonstone















Sapphire

Walnut















AVAILABLE ON WALNUT SPECIES:



Smokey Quartz Black Onyx

Grey Moonstone Pickled Pearl

Sapphire








7.0000" 14.0000" 7.0000" 7.0000" 7.0000" 7.0000

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Tiles: .68 SF

BOX QUANTITY:

20.4 SF per box.

60 tiles total per box/ 30 repeats.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES



Plain White Oak



Walnut

Quarter White

4. STAINS







Black Onyx



Grey Moonstone





Pickled Pearl













Sapphire

AVAILABLE ON WALNUT SPECIES:



Polished Amber





Smokey Quartz















Sapphire










2. LAYOUT SUGGESTIONS









SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

6 Tiles: 2.04 SF Numbers 1-6

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box/ 10 repeats.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

****This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES







4. STAINS







Black Onyx



Grey Moonstone





Pickled Pearl











Sapphire

Walnut

















AVAILABLE ON WALNUT SPECIES:








1. PATTERN AND REPEAT

2. LAYOUT SUGGESTIONS







SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

18.36 SF per box. 18 tiles total per box.

COVERAGE PER TILE:

1.02 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

****This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES







4. STAINS



Dolbhin







Grey Moonstone



Pickled Pearl











Sapphire

AVAILABLE ON WALNUT SPECIES:



Polished Amber

Polished Amber





Smokey Quartz



Black Onyx



















2. LAYOUT SUGGESTIONS











SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box.

COVERAGE PER TILE:

.34 SF per tile.

NAILHEAD:

Only offered in gold/bronze as shown.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

4. STAINS





Plain White Oak Walnut



Quarter White



Polished Amber





















Sapphire

AVAILABLE ON WALNUT SPECIES:

AVAILABLE ON WHITE OAK SPECIES

























1. PATTERN

2. LAYOUT SUGGESTIONS



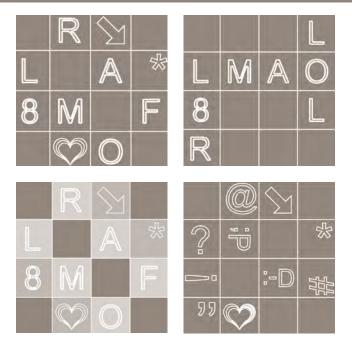

SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood. 4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A. This pattern is completely customizable. Designer specifies the amount of letters, graphics & blanks. They may also specify exact tiles needed.

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

Black Onyx

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

****This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

4. STAINS





Quarter White

AVAILABLE ON WALNUT SPECIES:























Dolphin Smokey Quartz

AVAILABLE ON WHITE OAK SPECIES

Smokey Quartz Black Onyx Grey Moonstone Pickled Pearl








. PATTERN & REPEAT

44.0000" 44.0000" 66.0000 7.0000" 7.0000" 13.0000"

2. LAYOUT SUGGESTIONS



SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood. 4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Planks: 3.67 SF

BOX QUANTITY:

22.02 SF per box. 12 tiles total per box/ 6 repeats.

COVERAGE PER TILE:

 $1.835 \ \mathrm{SF}$ per tile.

NAILHEADS:

Designer specifies finish. 4 options.

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species.

Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

4. STAINS







Quarter White

AVAILABLE ON WHITE OAK SPECIES





























5. NAILHEADS



AVAILABLE ON WALNUT SPECIES:
















button






1. PATTERN AND REPEAT

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Tiles: .68 SF

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box/ 30 repeats.

COVERAGE PER TILE:

.34 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although IBC makes no guarantees of representation of such

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES

4. STAINS



Plain White Oak Walnut



Quarter White























Sapphire



Polished Amber

Dolphin








Sapphire






I. PATTERN AND REPEAT

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Tiles: 1.175 SF

BOX QUANTITY:

26.25 SF per box.

30 tiles total per box/15 repeats.

COVERAGE PER TILE:

.5875 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

showers, etc.

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

 $\label{thm:expedited} Expedited options available upon request for an upcharge.$

PRICING:

Varies by pattern & wood species. Multiple stain selections do not affect pricing. FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

Plain White Oak





Quarter White

4. STAINS









Black Onyx



















AVAILABLE ON WALNUT SPECIES:

















Sapphire






1. PATTERN AND REPEAT

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

21 SF per box. 56 tiles total per box.

COVERAGE PER TILE:

.375 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

AVAILABLE ON WHITE OAK SPECIES

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although |BC makes no guarantees of representation of such

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES

4. STAINS

Polished Amber





Plain White Oak Walnut



AVAILABLE ON WALNUT SPECIES: Polished Amber Dolphin



















Sapphire



Smokey Quartz





Grey Moonstone Pickled Pearl





Sapphire






1. PATTERN AND REPEAT

12" 12"

2. LAYOUT SUGGESTIONS



SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Tiles: 1.167 SF

BOX QUANTITY:

23.32 SF per box. 40 tiles total per box/ 20 repeats.

COVERAGE PER TILE:

.5835 SF per tile.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on mesh or panel backing.

USAGE:

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such

CAD PATTRNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES



Plain White Oak





4. STAINS





Dolphin



Smokey Quartz



Black Onyx



















Sapphire



Polished Amber

Polished Amber



Dolphin









Grey Moonstone Pickled Pearl







Sapphire