






# PATTERN AND REPEAT

# 7.0000 12.0000 7.0000\*\* 12.0000" 3 5000\*\*

## 2. LAYOUT SUGGESTIONS

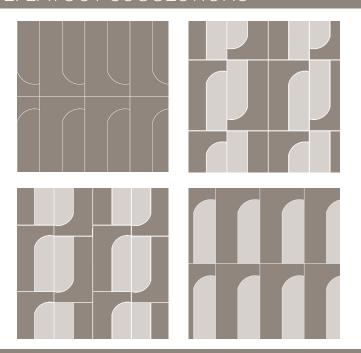

## **SPECIFICATIONS**

## WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

#### THICKNESS:

5/8 inches.

#### REPEAT:

2 Tiles: .583 SF

#### **BOX QUANTITY:**

23.32 SF per box.

80 tiles total per box/ 40 repeats.

#### COVERAGE PER TILE:

Varies

## INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on a mesh or panel backing.

#### USAGE:

Warranted for Commercial or Residential floors, walls &

Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

#### LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

## FIRE RATING:

Class C. (Class B available upon request)

#### STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

#### LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

\*\*\*This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

#### CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.



Plain White Oak Walnut



Quarter White

## 4. STAINS





AVAILABLE ON WALNUT SPECIES:

