


PATTERN AND REPEAT

6.7008" 12.2672" 6.7140" 12.26713 6.4081"

2. LAYOUT SUGGESTIONS

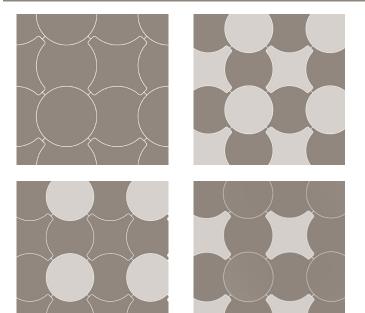

SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

4 Tiles: .885 SF 2 turtles, I star, I circle

BOX QUANTITY:

18.585 SF per box.

84 tiles total per box/ 21 repeats.

COVERAGE PER TILE:

Varies

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on a mesh or panel backing.

USAGE:

Warranted for Commercial or Residential floors, walls &

Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.



Plain White Oak Walnut



Quarter White

4. STAINS























AVAILABLE ON WALNUT SPECIES:



Dolphin



Smokey Quartz





Black Onyx Grey Moonstone Pickled Pearl









Sapphire