
# arrow







### 1. PATTERN AND REPEAT

### 2. LAYOUT SUGGESTIONS





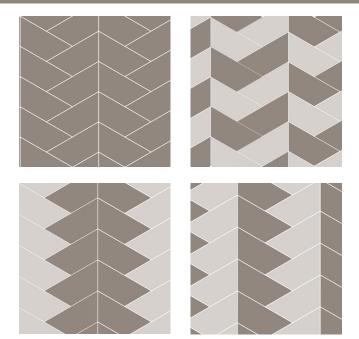

## SPECIFICATIONS

#### WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

#### THICKNESS:

5/8 inches.

### REPEAT:

2 Tiles: 1.178 SF

#### **BOX QUANTITY:**

24.738 SF per box. 42 tiles total per box/ 21 repeats.

#### **COVERAGE PER TILE:**

.589 SF per tile.

#### INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on a mesh or panel backing.

#### **USAGE:**

Warranted for Commercial or Residential floors, walls &

Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

#### LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

#### FIRE RATING:

Class C. (Class B available upon request)

#### STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

#### LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

\*\*\*This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

#### CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

### 3. SPECIES



Plain White Oak Walnut



Quarter White

### 4. STAINS





Smokey Quartz Black Onyx Grey Moonstone Pickled Pearl





















AVAILABLE ON WALNUT SPECIES:



Dolphin



Smokey Quartz





Black Onyx Grey Moonstone Pickled Pearl









Sapphire