

# 15' HALF HEIGHT OFFSHORE BASKET

## 15' x 8' x 4'2"

Removable Side Door

Hot Dip Galvanized or Painted Finish

## CERTIFICATIONS


DNV 2.7-1 (DNVGL-ST-E271) Standard for Offshore Containers

ISO 10855 International Standard for Offshore Containers and associated lifting sets

In support of IMO MSC Circ 860

API / Shell OPS0055 by request


Classification Society : Lloyd's Register or Det Norske Veritas (DNV)

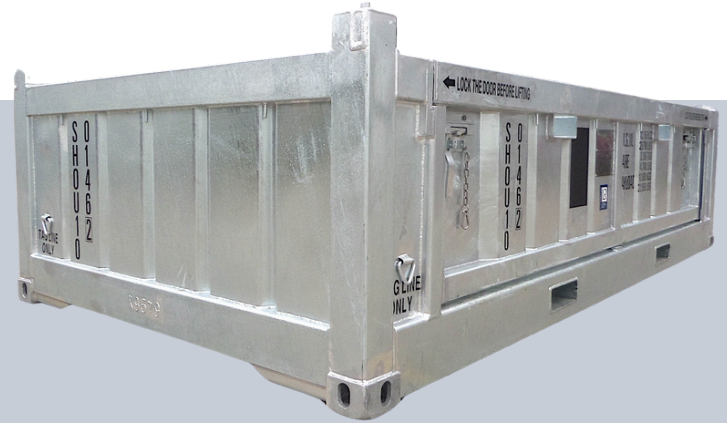

## DIMENSIONS (+/- 1/4")

Length	4572 mm 15'	4356 mm 14'- 3 31/64"
Width	2438 mm 8'	2152 mm 7'- 23/32"
Height	1280 mm 4'-2 25/64"	884 mm 2'-10 10/64"

Door Opening Width	3706 mm 12'- 1 57/64"
Internal Cubic Capacity	8.28 M <sup>3</sup> 292 FT <sup>3</sup>

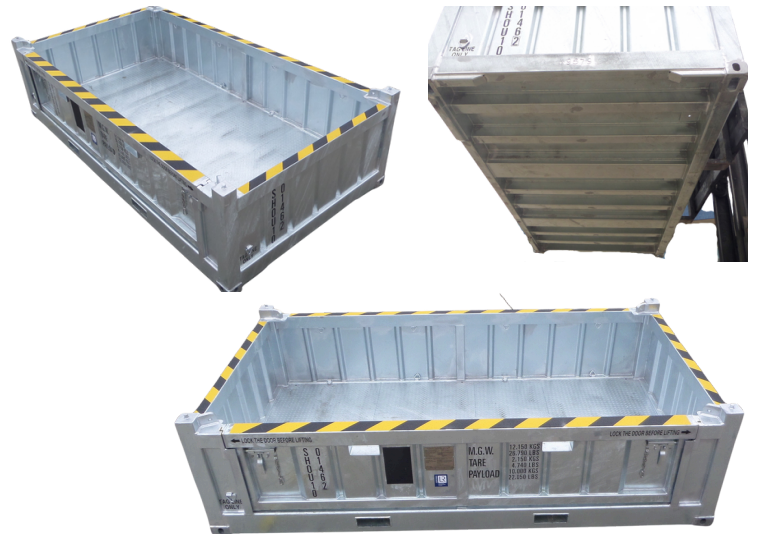

## RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	12,150 kg	26,790 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	2,150 kg	4,740 lbs

For Standard Cargo / Forklift Lift Movement

Max Gross Weight	12,150 kg	26,790 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	2,150 kg	4,740 lbs

## INCLUDES

- DNV Certified Wire Rope Lifting Sling
- Full Data Book
- Original Certificates
- Electronic Mobilization Packet
- Delivery to your yard

