

DARELO™



DA-6315

19" LED Round Slim Surface Light



Catalog #		Type
Project		Date
Prepared by		

Ceiling Light

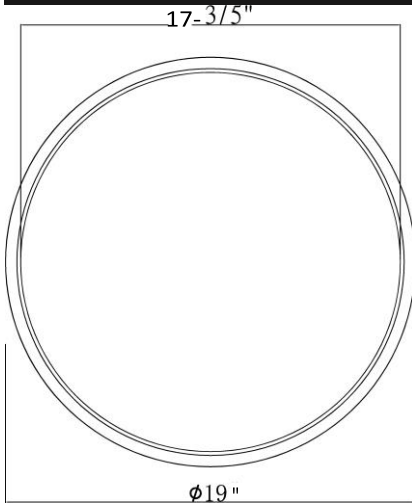

DESIGN FEATURES

- Durable steel back plate and heat sink
- Trim frame of aluminum
- Frosted polycarbonate lens for uniform distribution
- Damp Location Approved
- Driver Inside
- Mounting bracket included for installation in 3" or 4" J-Box wall or ceiling applications

Dimming

- When used with TRIAC dimming controls (Consult factory for compatible dimmers).

Warranty

- 50,000hr of lamp life.

Listing - ETL Listed.

SPECIFICATION	
LED Quantity	SMD
Input Voltage	120V AC
Wattage (+/-5%)	30W
Lumen (+/-5%)	2250lm
Efficacy(LPW) (+/-5%)	>75 lm/W
Color (+/-5%)	27K,30K, 35K,40K,50K
CRI (Typical)	>90
Beam Angle	110 Beam
Dimming	Triac
Lamp Life	50,000hr
Environment	Damp

120V Approved Dimmers
* Lutron : TGCL-153PH : LGCL-153PH : MACL-153M : DVCL-153P : CTCL-153P * Leviton: 6672 6674 IPL06 * Pass&seymour:HCL453P * Cooper:SAL06P
<i>Consult tech. service or factory for additional dimmers</i>