

Glass Solutions



ASSA ABLOY
Opening Solutions

PDU8000 Series Panic Device Order Form

Experience a safer
and more open world

Customer Information

Contact Name: _____ Date: _____

Company Name: _____ PO #: _____

Street Address: _____ Phone/Fax: _____ / _____

City/State/Zip: _____ Email: _____

Architect Name: _____ Job Name and Location: _____

* Please provide US customary fractional numbers only.



Quote #: _____ Total Devices: _____ Single Pair Door Markings: _____

Glass Thickness: 1/2" 3/4" Other _____

Specify Handing (check both for pairs):

4 (LHR) 3 (RHR)

Door Type:

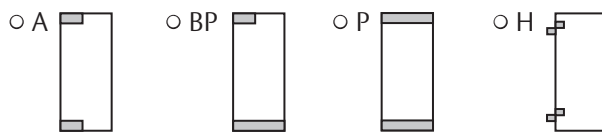

Balanced Door: Yes No

Description of Top Rail: Standard Profile Low Profile (less than 3" tall)
Rail Thickness: _____ (if not supplied by ASSA ABLOY)

Description of Bottom Rail: Standard Profile Low Profile (less than 3" tall)
Rail Thickness: _____ (if not supplied by ASSA ABLOY)

Actual Door Size¹: W: _____ H: _____

Jamb Condition (Pivot Side of Door): Sidelites Frame (specify width) _____ Wall
(Required if jamb condition is frame or wall) Pivot distance increased to 3 1/2" Manufacturer decreases horiz.

Distance between Centerline of crash bar to bottom of door:

37" 42" Other _____

Finish Options² (For both Panic Device and Mating Pull):

US32/629 US32D/630 US32MS US32D/US32 (Push) BSP
 WSP 314E 4E Stock Powder Coats (specify) _____

Engraved "PUSH" Area Finish Options:

Black Paint White Paint
 Less Paint (32 and powder coat only) Custom Color (specify) _____

¹Top door gap must be no less than 3/16".

²Powder Coat options may not be tested to BHMA finish standards.

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.




ASSA ABLOY
Opening Solutions

Mating Pull for Exterior Side:

0-No Mating Pull




1-Full Height L Shape



Degree of Swing:

- 90°
- 105°

2-Half Height L Shape



Degree of Swing:

- 90°
- 105°

3-Full Height Straight



Bottom of Ext Pull:

- Full Height
- _____" up from bottom of door

4-Half Height Straight



5-Short Centered Straight



6-Horizontal Straight



Degree of Swing:

- 90°
- 105°

Cylinder Options:

01 – Mortise Cylinder

04 – Customer Supplied Cylinder

Make: _____

Model: _____

Length of Cylinder: _____

02 – 7-pin SFIC housing w/plastic core

05 – Dummy Cylinder Housing

09 – 7 pin SFIC w/Yale Core (standard)

10 – Customer Swapping in Field

Make: _____

Model: _____

Length of Cylinder: _____

*03 – Special Order (keyed alike)

06 – Non-Keyed Function⁵
(Blank Escutcheon Plate provided)

Dogging Feature: Yes (standard)

No

Strike Options (check all that apply):

Manual

Electric:

Fail Safe or Fail Secure

12V or 24V

AC or DC

LCBMA Latch Bolt Monitoring (optional)

Strike Purchased / On

Other Paired Panic Device

WARNING: Be advised that use of unauthorized non- ASSA ABLOY products or parts such as strikes in conjunction with this product and/or installation outside GANA guidelines will void the warranty and any manufacturer owned liability, as well as decertify to UL305 and ANSI156.3 compliance.

Strike Finish Options:

US32/629 US32D/630 US32MS BSP WSP 314E 4E Stock Powder Coats (specify) _____

Consult local building codes for ADA compliance. Industry standards recommend crash bar and cylinder fall in between 34" and 48".

This device is tested and listed to UL 305 and BHMA 156.3-2020 standards under Rockwood Manufacturing Company, an ASSA ABLOY Group company.

⁵Only available on No Mating Pull and Horizontal Straight Mating Pull options.

*03 Cylinder option add on charge will apply. 4 week minimum lead time.