

10' HALF HEIGHT OFFSHORE BASKET

10' x 8' x 4'2"

Rear Swing Door

Hot Dip Galvanized or Painted Finish



CERTIFICATIONS

DNV 2.7-1 (DNVGL-ST-E271) Standard for Offshore Containers

ISO 10855 International Standard for Offshore Containers and associated lifting sets

In support of IMO MSC Circ 860

CSC Convention for Safe Containers

API / Shell OPS0055 by request

Classification Society : Lloyd's Register (LR) or Det Norske Veritas (DNV)

DIMENSIONS (+/- 1/4")

	EXTERNAL	INTERNAL
Length	2991 mm 9'-9 3/4"	2738 mm 8'-11 25/32"
Width	2438 mm 8'	2244 mm 7'-4 11/32"
Height	1280 mm 4'-2 3/8"	959 mm 3'-1 15/16"
Door Opening Width		2114 mm 6'-11 7/32"
Internal Cubic Capacity		5.89 M ³ 208 FT ³


RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	11,700 kg	25,800 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	1,700 kg	3,750 lbs

For Standard Cargo / Forklift Lift Movement

Max Gross Weight	11,700 kg	25,800 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	1,700 kg	3,750 lbs

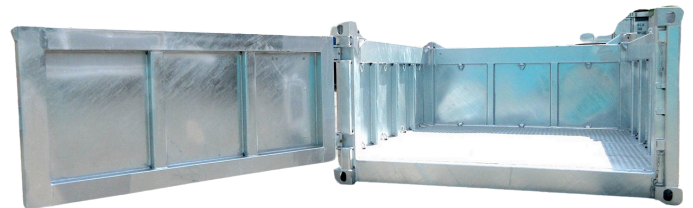

INCLUDES

- DNV Certified Wire Rope Lifting Sling
- Full Data Book
- Original Certificates
- Electronic Mobilization Packet
- Delivery to your yard

