windsor stitch



COUTURE COLLECTION FOR FLOORS, WALLS & CEILINGS

1. PATTERN & REPEAT

32.0000" 32.0000

2. LAYOUT SUGGESTIONS



SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

2 Planks: 1.27 SF

I Right & I Left

BOX QUANTITY:

22.86 SF per box.

32 planks total per box/ 18 repeats.

COVERAGE PER TILE:

.635 SF

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on a mesh or panel backing.

USAGE:

Warranted for Commercial or Residential floors, walls &

Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species.

Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC.

Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local IBC representative.

3. SPECIES

4. STAINS



Quarter White Oak



Noir



Noisette



Blanc



Dore



Gris



Rouge


hot to trot






1. PATTERN

2. LAYOUT SUGGESTIONS



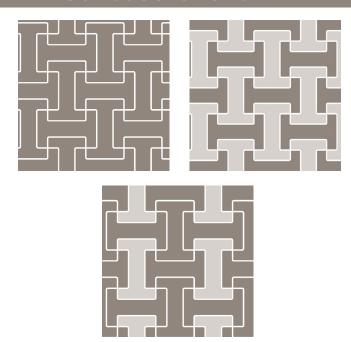

SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

21.76 SF per box. 64 tiles total per box.

COVERAGE PER TILE:

.34 SF

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on a mesh or panel backing.

USAGE

Warranted for Commercial or Residential floors, walls $\&\ {\rm ceilings.}$

Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

PRICING

Varies by pattern & wood species.

Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES

4. STAINS



Quarter White Oak



Noir Noisette







Blanc Dore

Gris

Rouge


nailed it






1. PATTERN

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

N/A

BOX QUANTITY:

20.4 SF per box. 60 tiles total per box.

COVERAGE PER TILE:

.34 SF per tile.

NAILHEADS:

Designer specifies finish. 4 options.

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on a mesh or panel backing.

Warranted for Commercial or Residential walls & ceilings. Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

Not suitable for flooring.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

PRICING:

Varies by pattern & wood species.

Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

3. SPECIES



Quarter White Oak



Noir



Noisette



Dore



Rouge



5. NAILHEADS



color blocked




COUTURE COLLECTION FOR FLOORS, WALLS & CEILINGS

1. PATTERN

15.4853" 15.4853" 7.0000" 16.9497" 16,9497"

2. LAYOUT SUGGESTIONS

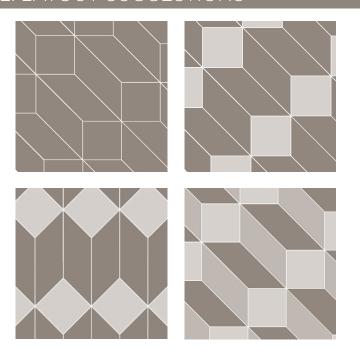

SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

3 Tiles: 1.17 SF

I Right, I Left & I Square

BOX QUANTITY:

21.06 SF per box.

54 tiles total per box/ 18 repeats.

COVERAGE PER TILE:

Varies

INSTALLATION:

Glue down. (See installation guidelines)

Wood tiles are NOT provided on a mesh or panel backing.

USAGE:

Warranted for Commercial or Residential floors, walls &

ceilings.

Not suitable for areas exposed to running water: inside

Not suitable for outdoor applications.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species.

Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC.

Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials

2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local IBC representative.

3. SPECIES

4. STAINS























Rouge Palette

Gris Palette









1. PATTERN & REPEAT

2. LAYOUT SUGGESTIONS





SPECIFICATIONS

WOOD TILE CONSTRUCTION:

Engineered wood.

4mm wear layer over 9 ply substrate.

THICKNESS:

5/8 inches.

REPEAT:

8 Tiles: 8.164 SF 2 Zippers & 6 boards.

BOX QUANTITY:

24.492 SF per box. 24 tiles total per box/ 3 repeats.

COVERAGE PER TILE:

Varies

INSTALLATION:

Glue down. (See installation guidelines) Wood tiles are NOT provided on a mesh or panel backing.

USAGE:

Warranted for Commercial or Residential floors, walls &

Not suitable for areas exposed to running water: inside showers, etc.

Not suitable for outdoor applications.

LEADTIME:

6-8 weeks for production.

Expedited options available upon request for an upcharge.

Varies by pattern & wood species. Multiple stain selections do not affect pricing.

FIRE RATING:

Class C. (Class B available upon request)

STAINING SYSTEM:

Rubio Monocoat hard oil finish - no VOC. Available unfinished.

LEED CREDITS:

2009 NC/CI MR Credit 5 - Regional Materials 2009 NC/CI IEQ Credit 4.1-4.4 - Low Emitting Finish

***This product may contribute to the achievement of LEED credits, although JBC makes no guarantees of representation of such.

CAD PATTERNS AVAILABLE UPON REQUEST.

Contact your local JBC representative.

SPECIES

4. STAINS



Quarter White Oak



NoirNoisette



Blanc









Gris