


# 16' HALF HEIGHT OFFSHORE BASKET

## 16' x 8' x 4'2"

Removable Side Door

Hot Dip Galvanized or Painted Finish

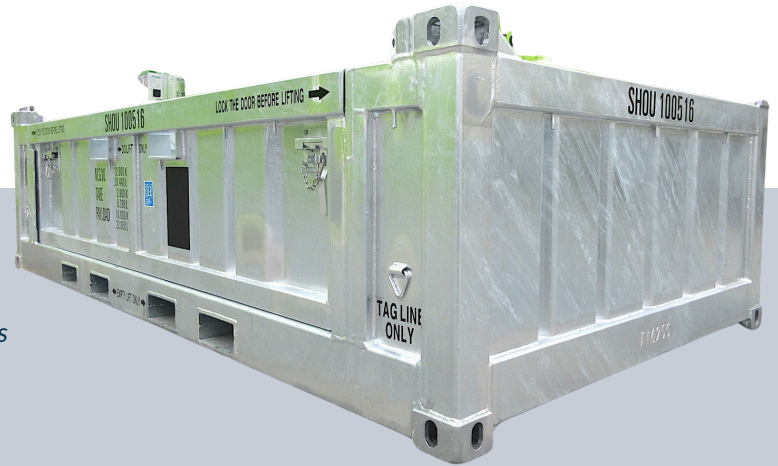

## CERTIFICATIONS

DNV 2.7-1 (DNVGL-ST-E271) Standard for Offshore Containers

ISO 10855 International Standard for Offshore Containers and associated lifting sets


In support of IMO MSC Circ 860

API / Shell OPS0055 by request

Classification Society : Lloyd's Register or Det Norske Veritas (DNV)

## DIMENSIONS (+/- 1/4")

	EXTERNAL		INTERNAL
Length	4880 mm 16'		4556 mm 14'-11 6/16"
Width	2438 mm 8'		2114 mm 6'- 11 4/16"
Height	1280 mm 4'-2"		907 mm 2'- 11 11/16"
Door Opening Width			3700 mm 12'- 1 1/2"
Internal Cubic Capacity			8.73 M <sup>3</sup> 308 FT <sup>3</sup>

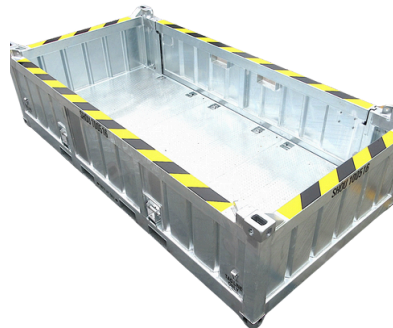

## RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	12,900 kg	28,440 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	2,900 kg	6,390 lbs

For Standard Cargo / Forklift Lift Movement

Max Gross Weight	12,900 kg	28,440 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	2,900 kg	6,390 lbs

## INCLUDES

- DNV Certified Wire Rope Lifting Sling
- Full Data Book
- Original Certificates
- Electronic Mobilization Packet
- Delivery to your yard

