

# Finiré 3"

Finiré 3" is a flexible, architectural grade downlight that comes with the highest quality 95+ CRI LEDs and Lutron 0.1% digitally addressable or 1% 2-wire dimming. This luminaire has a complete selection of lens, finish and performance options, designed for the luxury home.



## Trim Options

Trim Options	Square Flanged Adjustable	Square Flangeless Adjustable	Square Flanged Downlight	Round Flanged Downlight	Square Flanged Downlight	Round Flangeless Downlight	Round Flanged Adjustable
Shown in:	Matte White	Matte Black	Silver	Bronze	Silver/White	Clear Anodized	Clear Chrome

Pinhole Trim Options	Square Pinhole Downlight	Round Pinhole Downlight	Square Flangeless Pinhole Downlight	Round Flangeless Pinhole Downlight	Round Pinhole (Slotted) Adjustable	Round Flangeless Pinhole (Slotted) Adjustable

**Dimensions:** 3.4" W Aperture; 5.0" W Trim

**Ratings:**\* CA T24/JA8, spray foam and EnergyStar

\* See the Finiré 3" specification sheet for details

## High-Performance LED

Finiré Model	Standard	Warm Dimming
<b>CRI (Typical)</b>	95, R9=85	95, R9=85
<b>Lumens (Delivered)</b>	650-1750	800
<b>Wattage</b>	15	15
<b>Efficacy (Lumens/Watt)</b>	38-65	50

Independent measurement of typical 3000K downlight fixture models by Lutron Electronics Co., Inc. for reference only. See the Finiré 3" specification sheets for LM79 photometric data by fixture type and trim options.

## Lens & Finish Options for Every Ceiling Type

### Lens

Micro Prism Solite™	Frosted Glass	Wall Wash	No Lens

Note: All lens and finish options (except no lens) are wet (damp) location rated for covered, ceiling mount interior or exterior applications.

### Finish


Matte White*	Matte Black*	Silver*	Bronze*	Silver/White**	Clear Anodized/White**	Clear Chrome/White**	Black Chrome/White**

\*Matte White, Matte Black, Silver and Bronze are coordinated color finishes to match Finiré Prime and Ketra D3 downlights.


\*\*White flange standard with flanged trims

## Housings

### IC housing

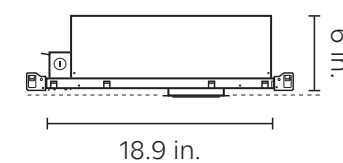


### Non-IC housing

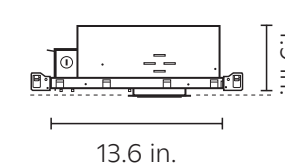

Note: Specification and install made easy with the adjustable housing options allowing field changeable beam spreads and the ability to convert from adjustable to wall wash and fixed downlight or standard trims to flangeless (mud-in) or pin hole options after wiring & ceiling install.

## Field Changeable Beam Angles

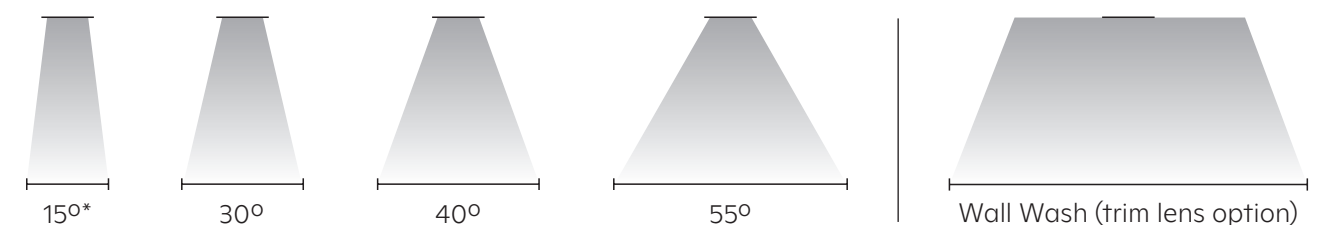

\* 150° not field changeable or available in warm dimming options