

### FHC PANIC DEVICE ORDER FORM

**CUSTOMER INFORMATION**

CONTACT NAME \_\_\_\_\_ DATE \_\_\_\_\_

COMPANY NAME \_\_\_\_\_ PO # \_\_\_\_\_

STREET ADDRESS \_\_\_\_\_ PHONE \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_ FAX \_\_\_\_\_

ARCHITECT NAME \_\_\_\_\_ EMAIL \_\_\_\_\_

JOB NAME \_\_\_\_\_

**PANIC HOUSING**

HP100 SERIES

**SPECIFY HANDING**  
(Check Both for Pairs)

4 (LHR)  3 (RHR)

**EXTERIOR HANDLE**

A  B  D  F  F-S  
 G  H  J  J-S   
 M  M-S  X  Z

**PAIR OF DOORS** \_\_\_\_\_ MARK # \_\_\_\_\_


**SINGLE DOOR(S)** \_\_\_\_\_

SWING 3 (RHR) \_\_\_\_\_ MARK # \_\_\_\_\_

SWING 4 (RHR) \_\_\_\_\_ MARK # \_\_\_\_\_

**DUMMY HOUSING**

HPD100 SERIES



**GLASS THICKNESS**

1/2"  5/8"  3/4"  OTHER \_\_\_\_\_


**TOP RAIL DESCRIPTION**

FHC LOW PROFILE  
 2-1/2" TAPERED RAIL  
 2-1/2" SQUARE RAIL  
 FHC STANDARD PROFILE  
 4" TAPERED RAIL  
 4" SQUARE RAIL

**BOTTOM RAIL DESCRIPTION**

FHC LOW PROFILE  
 2-1/2" TAPERED RAIL  
 2-1/2" SQUARE RAIL  
 FHC STANDARD PROFILE  
 4" TAPERED RAIL  
 4" SQUARE RAIL  
 10" SQUARE RAIL

**DOOR TYPE (Check One)**

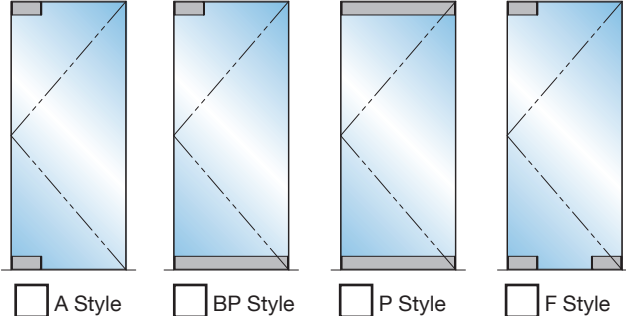

FHC LOW PROFILE PATCH  
 2-1/2" TAPERED RAIL  
 2-1/2" SQUARE RAIL

FHC LOW PROFILE PATCH  
 2-1/2" TAPERED RAIL  
 2-1/2" SQUARE RAIL

FHC PATCH PROFILE  
 4" TAPERED RAIL  
 4" SQUARE RAIL

FHC PATCH PROFILE  
 4" TAPERED RAIL  
 4" SQUARE RAIL

NORTH AMERICAN PATCH  
 PF201 TOP PATCH

NORTH AMERICAN PATCH  
 PF201 BOTTOM PATCH

RAIL THICKNESS \_\_\_\_\_  
(If Not Supplied by FHC)

RAIL HEIGHT \_\_\_\_\_  
(If Not Supplied by FHC)

**DISTANCE BETWEEN CENTERLINE OF CRASH BAR TO BOTTOM OF DOOR**

36" A.D.A Keyed Cylinder Compliant Height  
 42" N.F.P.A 15 lb. 101 Compliant Height  
 OTHER \_\_\_\_\_

**! IMPORTANT INFORMATION**

**JAMB CONDITION (Pivot Side Door)**  
 Required If Jamb Conditions is Frame or Wall

SIDELITES  WALL  
 FRAME (Specify Width) \_\_\_\_\_  
 PIVOT DISTANCE INCREASED TO 3-1/2"  
**Note:** When Adjacent Wall at 90 Degree.  
 For A.D.A Requirement, Minimum 37" Door Opening Required.

FHC TO DECREASE HORIZONTAL DIMENSION  
**Note:** When Jamb is Wider Than 4".

**NET DOOR SIZE**

WIDTH \_\_\_\_\_ HEIGHT \_\_\_\_\_

**STRIKE OPTIONS (Check All That Applies)**

MANUAL  ELECTRIC  Fail Safe or  Fail Secure  
 12V or  24V  
 AC or  DC

**FINISHES (For Both Panic Device and Exterior Pull)**

BRUSHED STAINLESS  POLISHED STAINLESS  
 MATTE BLACK (Powder Coat)  POWDER COAT FINISH (Specify) \_\_\_\_\_

**STRIKE FINISHES OPTIONS**

BRUSHED STAINLESS  POLISHED STAINLESS  
 MATTE BLACK (Powder Coat)  POWDER COAT FINISH (Specify) \_\_\_\_\_  
 OTHER \_\_\_\_\_

**FHC RECOMMENDS THAT DOOR HEIGHT BE LIMITED TO:**

**1/2" (12 mm) and 9/16" (13.52 mm)**

Exterior Opening: 8'-0" (2.44 m)

Interior Opening: 8'-6" (2.59 m)

**5/8" (16 mm), 3/4" (19 mm) and 13/16" (21.52 mm)**

Exterior Opening: 8'-6" (2.59 m)

Interior Opening: 9'-0" (2.74 m)




Doors exceeding these recommendations above, the designer should take into account the following factors:

- Volume of Daily Usage (Number of Anticipated Cycles)
- Deflection of Door Due to Wind and/or Stack Load Pressures
- Stability of Door Under Operation (How Much the Door Flexes When Pushed)



For assistance in design applications, please contact our Technical Sales at Toll Free **(888) 295-4531**.

**Operating Handles on Interior Side of Door**

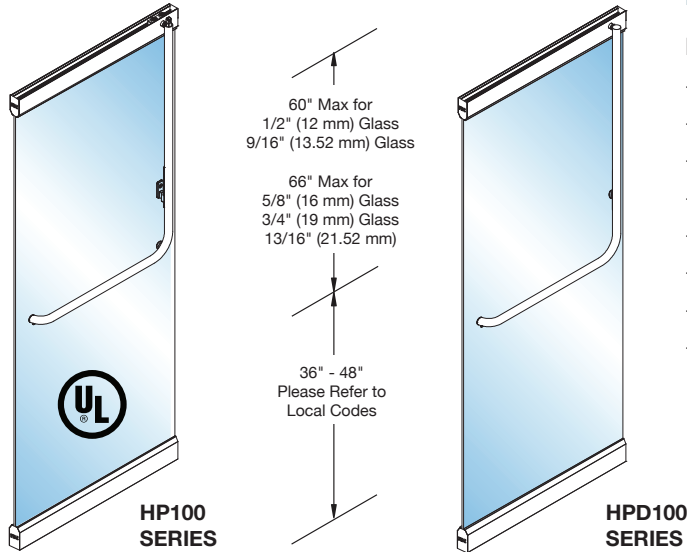

**FHC INTERIOR DOOR HANDLES**

**Panic and Dummy handles**

- For 1/2" (12 mm), 5/8" (16 mm) or 3/4" (19 mm) Tempered Glass
- For 9/16" (13.52 mm) or 13/16" (21.52 mm) Tempered Laminated Glass
- Can Be Used as Replacement for Older Panics
- Custom Sizes of Stock Finishes Ship Within Five to Seven Business Days
- Optional Keyed Access
- Optional Electric Strike
- Optional Exterior Fixed Handles
- Available in Polished or Brushed Stainless Steel, Matte Black and Power Coat Finish

**FHC EXTERIOR PUSH/PULL HANDLE COMBINATIONS FOR PANIC AND DUMMY HANDLES**

