12’ HALF HEIGHT OFFSHORE BASKET

12’ x 8’ x 4'1"

Removable Side Door
Hot Dip Galvanized or Painted Finish

CERTIFICATIONS

DNV 2.7-1 (DNVGL-ST-E271) *Standard for Offshore Containers*
ISO 10855 *International Standard for Offshore Containers and associated lifting sets*
In support of **IMO MSC Circ 860**
API / Shell OPS0055 *by request*
Classification Society : Lloyd’s Register or Det Norske Veritas (DNV)

DIMENSIONS (+/- 1/4")

	EXTERNAL		INTERNAL	
Length	3657 mm	12'	3453 mm	11'- 3 15/16"
Width	2438 mm	8'	2234 mm	7'- 3 15/16"
Height	1245 mm	4'-1"	959 mm	3'- 1 3/4"
Door Opening Width			2500 mm	8'- 2 27/64"
Internal Cubic Capacity			7.4 M^3	261 FT^3

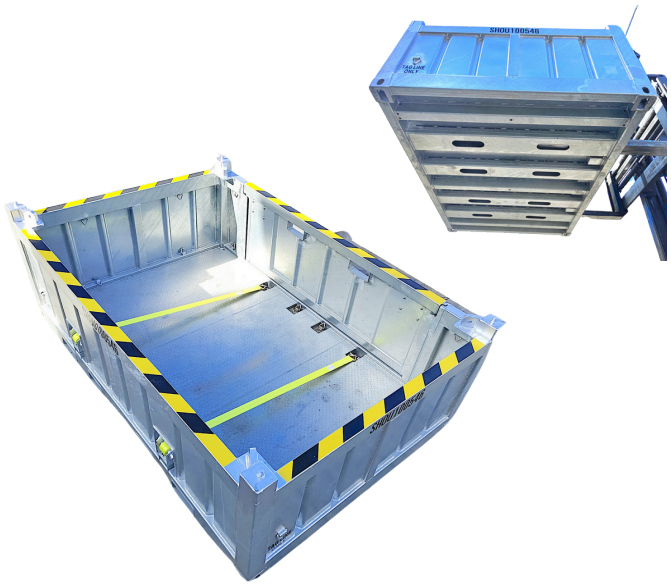

RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	11,850 kg	26,130 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	1,850 kg	4,080 lbs

For Standard Cargo / Forklift Lift Movement

Max Gross Weight	11,850 kg	26,130 lbs
Max Payload	10,000 kg	22,050 lbs
Tare Weight	1,850 kg	4,080 lbs

INCLUDES

- **DNV Certified Wire Rope Lifting Sling**
- **Full Data Book**
- **Original Certificates**
- **Electronic Mobilization Packet**
- **Delivery to your yard**