


6'6" OFFSHORE TOOL BOX

6'6" x 3'11" x 3'8"

Single Lid

Painted or Hot Dipped Galvanized

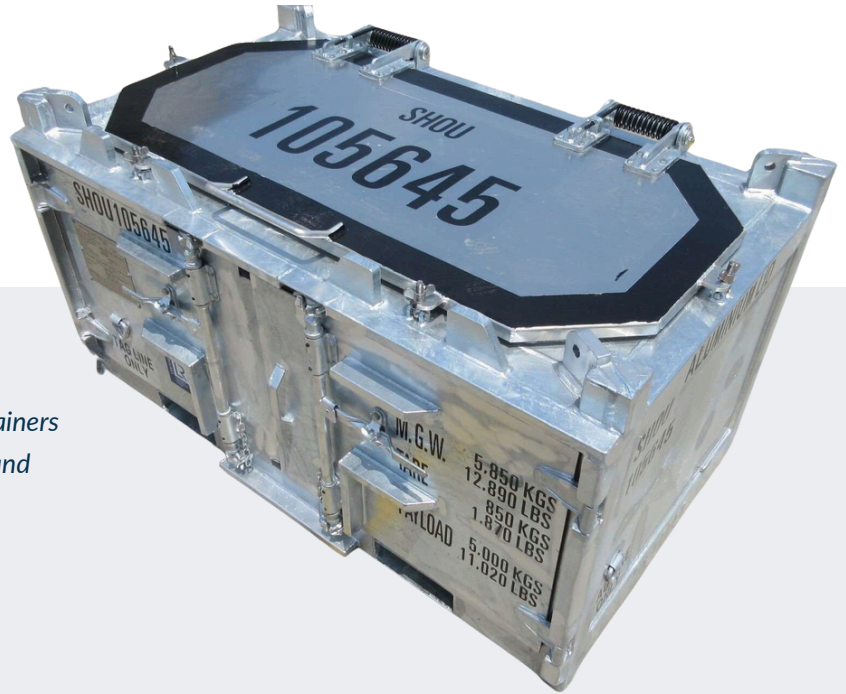

CERTIFICATIONS

DNV 2.7-1 (DNVGL-ST-E271) Standard for Offshore Containers

ISO 10855 International Standard for Offshore Containers and associated lifting sets

In support of IMO MSC Circ 860

CSC Convention for Safe Containers

API / Shell OPS0055 by request

Classification Society : Lloyd's Register or DNV GL

DIMENSIONS (+/- 4/16")

	EXTERNAL		INTERNAL	
Length	2000 mm	6'-6 12/16"	1842 mm	6'-8 1/16"
Width	1196 mm	3'-11 1-16"	1015 mm	3'-3 15/16"
Height	1138 mm	3'-8 13/16"	831 mm	2'-8 11/16"

Side Door Opening Width	1800 mm	5'-10 14/16"
Side Door Opening Height	736 mm	2'-5"
Top Lid Opening Width	822 mm	2'-8 6/16"
Top Lid Opening Length	1890 mm	6'-2 7/16"
Internal Cubic Capacity	1.55 M ³	55FT ³

RATINGS (+/- 3%)

For Offshore / Sling Movement

Max Gross Weight	5,850 kg	12,890 lbs
Max Payload	5,000 kg	11,020 lbs
Tare Weight	850 kg	1,870 lbs

For Standard Cargo / Lift Movement

Max Gross Weight	5,850 kg	12,890 lbs
Max Payload	5,000 kg	11,020 lbs
Tare Weight	850 kg	1,870



INCLUDES

- DNV Certified Wire Rope lifting sling
- Full Data Book
- Original Certificates
- Electronic Mobilization Packet
- Delivery to your yard

